

## Step 1


- Turn the tracker face down.
- Unscrew the 6 screws.

*Tip: If using a power drill, use power setting 7, on low. (Note: not all power drills have the same settings!)*




## Step 2

Remove the back plate and the 6 screws.

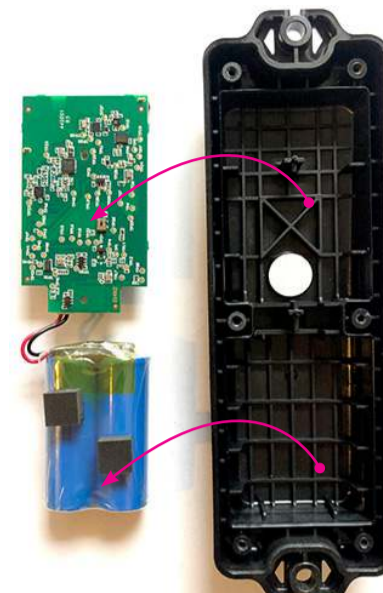


## Step 3

Remove the circuit board and the battery pack.

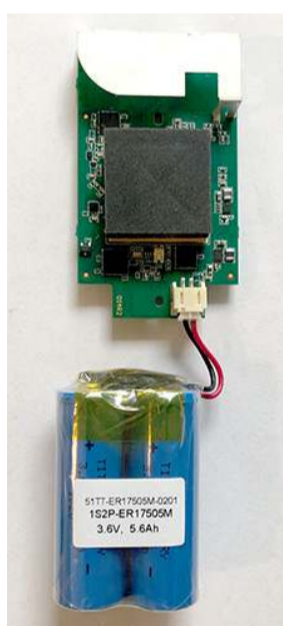

## Step 4

Turn around the circuit board and battery pack

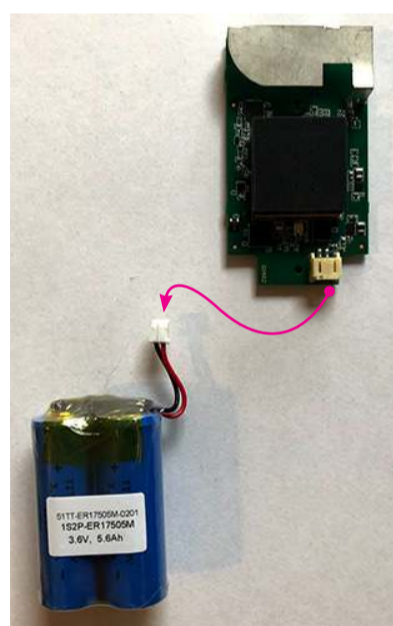

## Step 5

Remove the battery pack - pull them out of the connector.



## Step 6

Add a new battery pack, be careful with the connector. A green LED will blink when the battery pack is connected.



## Step 7


Reinsert the circuit board and battery pack. Make sure the LED is facing downward and the foam on the battery is facing upwards.



## Step 8

Close the case again by tightening the 6 screws in the corresponding holes. Be careful not to break the casing when using a power drill.

# Indicate battery replaced in platform

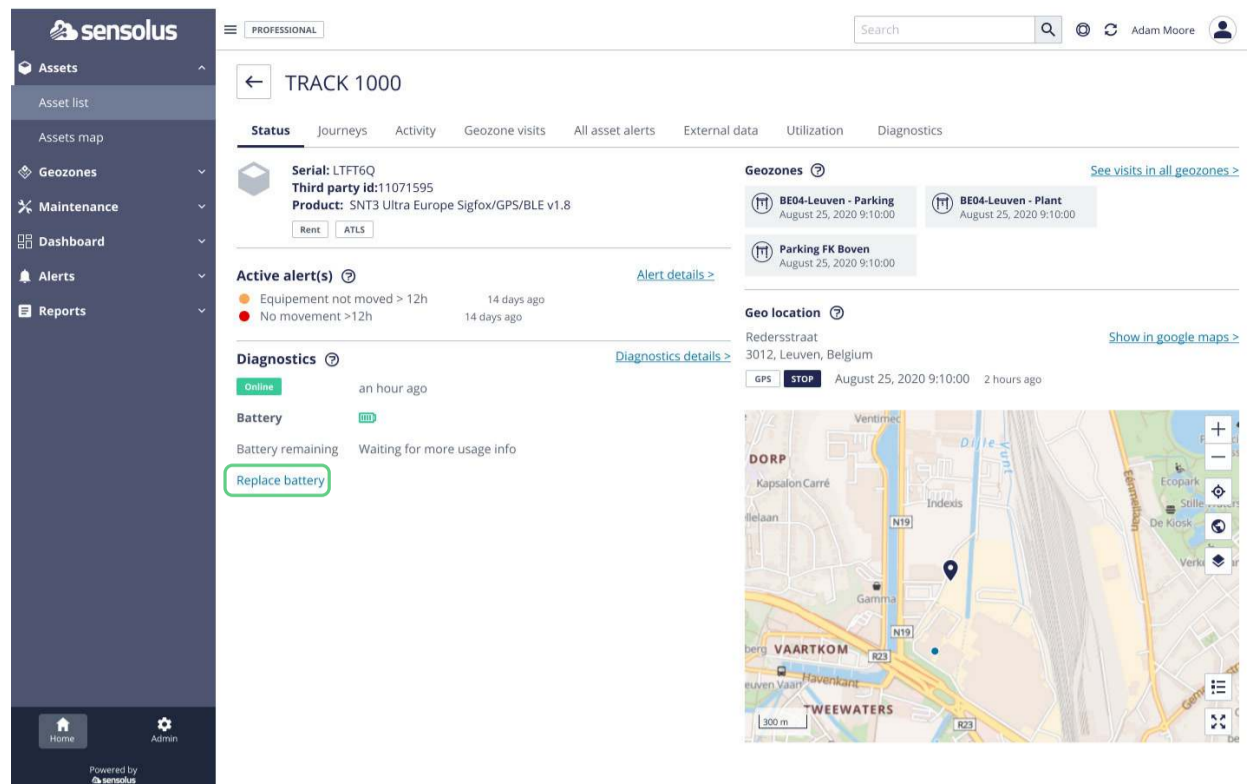

When you replaced the battery in the tracker you have to indicate that in the platform.

- Go to the tracker details page in the general section. You can search for this tracker or find it in the asset list or asset map.
- Click on the replace battery link to indicate you have replaced the battery of that tracker.
- Confirm the update.

